


ELECTROVÁLVULAS DIRECIONAIS NG6

ELECTRO DIRECTIONAL VALVES NG6


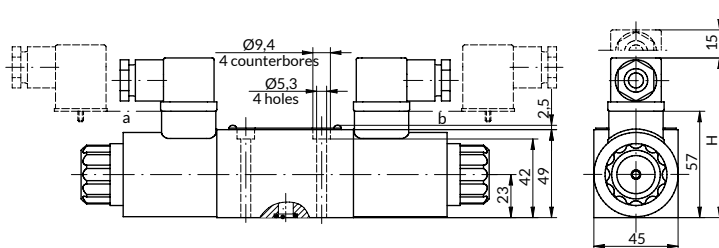


CARACTERÍSTICAS:

Os distribuidores direcionais tipo WE06... accionados electricamente destinam-se a mudar a direcção do fluxo de fluido num sistema hidráulico e, portanto, permitem mudar a direcção do movimento de um receptor - na sua maioria, haste de pistão de um cilindro ou motor hidráulico também para utilizar funções: ligar e desligar. Estes distribuidores direcionais são utilizados para montagem de subplacas em qualquer posição de um sistema hidráulico.

CHARACTERISTICS:

Directional spool valves type WE06... electrically operated are intended for change in direction of fluid flow in a hydraulic system and thus it allows to change direction of movement of a receiver - mostly piston rod of a cylinder or hydraulic motor as well to use functions: on and off. These directional spool valves are used for subplate mounting in any position in a hydraulic system.

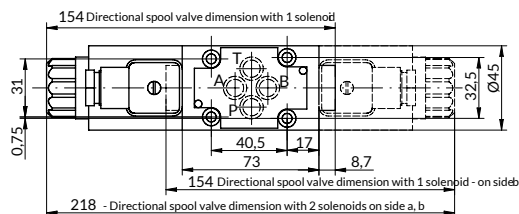

REFERÊNCIA CODE	CAUDAL FLOW RATE L/min	PRESSÃO MAX. TRAB. MAX. OPER. PRESSURE Bar Porta/port P.A.B T	NÚMERO BOBINAS NUMBER SOLENOIDS	ESQUEMAS // DIAGRAMS		VOLTAGEM VOLTAGE
				POSICÕES DE TRABALHO WORKING POSITIONS	POSICÕES INDIRECTAS INDIRECT POSITIONS	
H13.04.00001	80	350 210	1			24VDC
H13.04.00002	80	350 210	1			24VDC
H13.04.00005	80	350 210	1			24VDC
H13.04.00010	80	350 210	2			24VDC
H13.04.00015	80	350 210	2			24VDC
H13.04.00016	80	350 210	2			12VDC

ELECTROVÁLVULAS DIRECIONAIS NG6

ELECTRO DIRECTIONAL VALVES NG6



REFERÊNCIA CODE	CAUDAL FLOW RATE L/min	PRESSÃO MAX. TRAB. MAX. OPER. PRESSURE Bar Porta/port P.A.B T	NÚMERO BOBINAS NUMBER SOLENOIDS	ESQUEMAS // DIAGRAMS		VOLTAGEM VOLTAGE	
				POSICÕES DE TRABALHO WORKING POSITIONS			
				A B a 0 b P T	A B a b P T		
H13.04.00017	80	350	210	2			24VDC
H13.04.00025	80	350	210	2			24VDC
H13.04.00027	80	350	210	2			24VDC
H13.04.00033	80	350	210	1			24VDC
H13.04.00034	80	350	210	2			24VDC
H13.04.00035	80	350	210	2			24VDC
H13.04.00036	80	350	210	2			24VDC
H13.04.00037	80	350	210				24VDC
H13.04.00038	80	350	210	2			24VDC
H13.04.00070	80	350	210	1			12VDC
H13.04.00075	80	350	210	1			12VDC
H13.04.00080	80	350	210	1			12VDC
H13.04.00085	80	350	210	1			12VDC
H13.04.00090	80	350	210	1			12VDC

ELECTROVÁLVULAS DIRECIONAIS NG6

ELECTRO DIRECTIONAL VALVES NG6



REFERÊNCIA CODE	CAUDAL FLOW RATE L/min	PRESSÃO MAX. TRAB. MAX. OPER. PRESSURE Bar Porta/port P.A.B T	NÚMERO BOBINAS NUMBER SOLENOIDS	ESQUEMAS // DIAGRAMS		VOLTAGEM VOLTAGE
				POSICÕES DE TRABALHO WORKING POSITIONS	POSICÕES INDIRECTAS INDIRECT POSITIONS	
H13.04.00095	80	350	210	1	GB	12VDC
H13.04.00100	80	350	210	1	HA	12VDC
H13.04.00105	80	350	210	1	D	12VDC
H13.04.00110	80	350	210	1	D	220VDC
H13.04.00115	80	350	210	2	E	12VDC
H13.04.00120	80	350	210	2	E	220VDC
H13.04.00125	80	350	210	2	F	12VDC
H13.04.00130	80	350	210	2	F	220VDC
H13.04.00135	80	350	210	2	G	12VDC
H13.04.00140	80	350	210	2	G	220VDC
H13.04.00145	80	350	210	2	H	12VDC
H13.04.00150	80	350	210	2	H	220VDC
H13.04.00155	80	350	210	2	J	12VDC
H13.04.00160	80	350	210	2	J	12VDC

ELECTROVÁLVULAS DIRECIONAIS NG6

ELECTRO DIRECTIONAL VALVES NG6



REFERÊNCIA CODE	CAUDAL FLOW RATE L/min	PRESSÃO MAX. TRAB. MAX. OPER. PRESSURE Bar Porta/port P.A.B T	NÚMERO BOBINAS NUMBER SOLENOIDS	ESQUEMAS // DIAGRAMS		VOLTAGEM VOLTAGE
				POSICÕES DE TRABALHO WORKING POSITIONS	POSICÕES INDIRECTAS INDIRECT POSITIONS	
H13.04.00165	80	350	210	2		12VDC
H13.04.00170	80	350	210	2		220VDC
H13.04.00175	80	350	210	2		12VDC
H13.04.00180	80	350	210	1		220VDC
H13.04.00185	80	350	210	2		12VDC
H13.04.00190	80	350	210	2		220VDC
H13.04.00195	80	350	210	2		12VDC
H13.04.00200	80	350	210			220VDC
H13.04.00205	80	350	210	2		12VDC
H13.04.00210	80	350	210	1		220VDC
H13.04.00215	80	350	210	1		12VDC
H13.04.00220	80	350	210	1		220VDC
H13.04.00225	80	350	210	1		12VDC
H13.04.00230	80	350	210	1		220VDC

ELECTROVÁLVULAS DIRECIONAIS NG6

ELECTRO DIRECTIONAL VALVES NG6



REFERÊNCIA CODE	CAUDAL FLOW RATE L/min	PRESSÃO MAX. TRAB. MAX. OPER. PRESSURE Bar Porta/port P.A.B T	NÚMERO BOBINAS NUMBER SOLENOIDS	ESQUEMAS // DIAGRAMS		VOLTAGEM VOLTAGE
				POSICÕES DE TRABALHO WORKING POSITIONS	POSICÕES INDIRECTAS INDIRECT POSITIONS	
H13.04.00240	80	350	210	1	U	220VDC
H13.04.00253	80	350	210	1	U	12VDC
H13.04.00260	80	350	210	1	HB	12VDC
H13.04.00265	80	350	210	1	JA	12VDC
H13.04.00270	80	350	210	2	JB	12VDC
H13.04.00275	80	350	210	2	LA	12VDC
H13.04.00280	80	350	210	2	LB	12VDC
H13.04.00285	80	350	210	2	MA	12VDC
H13.04.00290	80	350	210	2	MB	12VDC
H13.04.00295	80	350	210	2	PA	12VDC
H13.04.00300	80	350	210	2	PB	12VDC
H13.04.00305	80	350	210	2	UA	12VDC
H13.04.00310	80	350	210	2	UB	12VDC